




Model
LDT

Leak/Over Temperature Detection Relay

Shaft Seal Leak and Stator Temperature Monitor

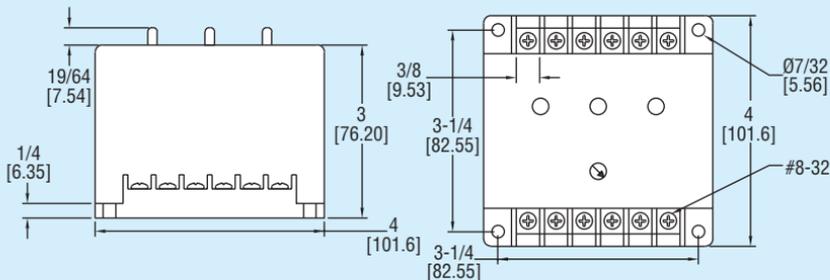

The Model LDT is used to monitor the shaft seal and the stator temperature of a submersible pump to detect a leak or over-temperature before pump failure. A leak is detected by sensing the status of a float or conductivity switch installed in the seal cavity. When this resistance drops below the set sensitivity, the output relay energizes and the LED indicator illuminates. When the seal failure condition clears, the relay automatically resets. A normally closed temperature switch mounted on the stator detects over-temperature. The temperature safety feature incorporates a bistable relay that retains its position during power loss and latches on until the remote reset button is pressed. The LDT has adjustable leak sensitivity from 1 K to 35 K Ω . Installation is made simple with a surface mount configuration.

Model LDT-AS, Leak/Over-Temperature Detection Relay

SPECIFICATIONS

Power Requirement: 120 VAC, 50/60 Hz.

Power Consumption: 4 VA (approximate).

Sensitivity: 1 K to 35 K Ω adjustable.

Temperature Limits: Operating: -4 to 131°F (-20 to 55°C); Storage: -40 to 185°F (-40 to 85°C).

Sensor Voltage: 12 VDC.

Switch Type: (2) SPDT.

Electrical Rating: 10 A @ 120 VAC resistive.

Response Times: Leakage trip: 1 s; Leakage reset: 1 s; Temperature trip: 0.1 s.

Indicators: Green LED illuminates under normal operation; Red LED's illuminate when leak or over-temperature is detected.

Enclosure: Polycarbonate dust cover.

Mounting: Surface mount.

Weight: 17 oz (482 g).

Agency Approval: UL 508.