




Series
DTM

Dip Tape Level Indicator Metal

Customizable, Lightweight, No Electricity Needed

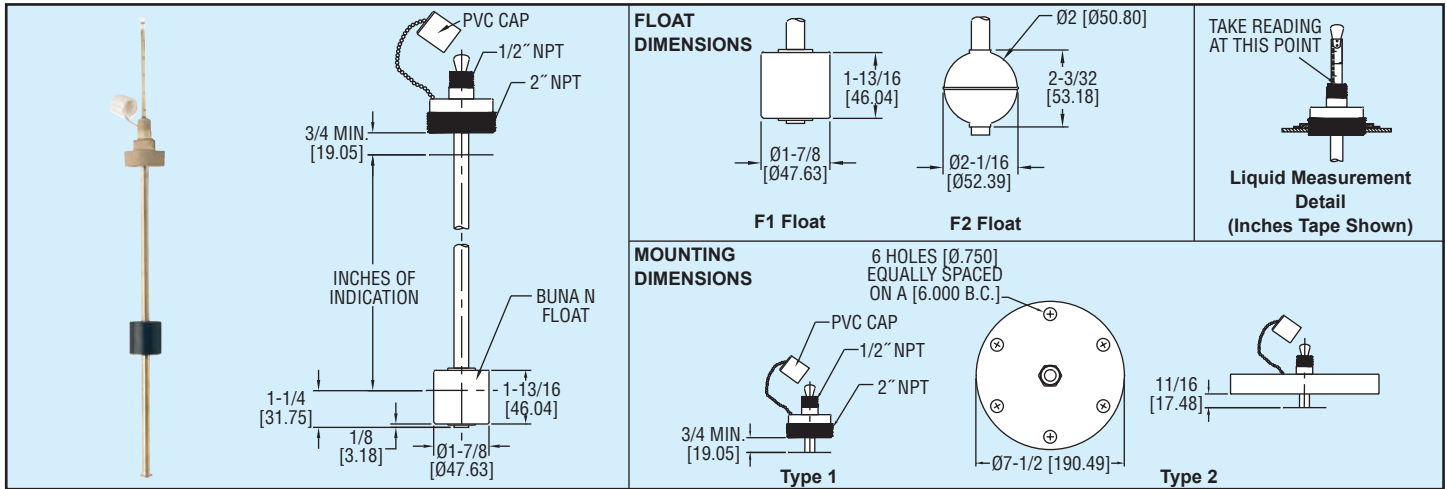

The Series DTM is a manual, no electricity required indicator that is compact, providing uninterrupted liquid level indication for use in storage tanks or vessels. With a sturdy, lightweight design, the DTM is ideal for 30 or 55 gallon tanks. Stem and mounting fixtures are available in 316 SS or brass. Strong brass or stainless steel units are perfect for the use in water and oils offering the best temperature and pressure capabilities. The float and stem are the only parts of the DTM that make contact with the liquid, so the indication tape is always clean and easy to read. It is simple to customize the DTM level indicator in order to meet a particular application requirement. A custom configurable DTM is available in lengths ranging from 6 in (15.2 cm) up to 6 ft (182.9 cm). This level indicator is ideal for quick readouts taken periodically. The DTM is accurate to 1/16 of an inch or 1 mm, and is especially useful in remote areas where power is unavailable, or undesirable.

PRINCIPLE OF OPERATION

The float located on the DTM is equipped with a magnet that moves with the liquid level, vertically, along the stem, inside the storage vessel. Level reading is acquired by simply removing the protective cap located on the top of the unit and lifting the calibrated measuring tape until the magnetic interlock with the float causes a slight pull. The indicator tape remains at this point while the level is read where the calibration aligns with the top of the mounting. The indicator tape can then be lowered back inside the unit stem for storage and protection.

SPECIFICATIONS

- Service:** Compatible liquids.
- Wetted Materials:** See model chart.
- Temperature Limits:**
 - Buna N: -40 to 230°F (-40 to 110°C) for oil, up to 180°F (82.2°C) for water;
 - 316 SS: -40 to 300°F (-40 to 148.8°C).
- Pressure Limits:** See model chart.
- Mounting Orientation:** Vertically in either vertical or horizontal tanks.
- Indication Markings:** 1/16 in or 1 mm increments.

Model	Description
DTM-B1F1N-17.50	Brass, Buna N float, 2" NPT, 30 gallon horizontal drum, 17.5"
DTM-B1F1N-22.00	Brass, Buna N float, 2" NPT, 55 gallon horizontal drum, 22"
DTM-B1F1N-26.50	Brass, Buna N float, 2" NPT, 30 gallon vertical drum, 26.5"
DTM-B1F1N-33.00	Brass, Buna N float, 2" NPT, 55 gallon vertical drum, 33"
DTM-S1F2N-17.50	316 SS, 2" NPT, 30 gallon horizontal drum, 17.5"
DTM-S1F2N-22.00	316 SS, 2" NPT, 55 gallon horizontal drum, 22"
DTM-S1F2N-26.50	316 SS, 2" NPT, 30 gallon vertical drum, 26.5"
DTM-S1F2N-33.00	316 SS, 2" NPT, 55 gallon vertical drum, 33"

LEVEL

Example	DTM	B	1	F1	N	6.00	DTM-B1F1N-6.00									
Series	DTM						Dip Tape Metal									
Stem & Connection Material		B S C					Brass (not available with conn. type 2) 316 SS 316 SS with carbon steel flange (not available with conn. type 1)									
Connection Type			1 2				2" NPT 3" 150 # ANSI flange									
Float Type				F1 F2			<table border="1"> <thead> <tr> <th>Material</th> <th>Min. s.g.</th> <th>Max. Pressure</th> </tr> </thead> <tbody> <tr> <td>Buna N</td> <td>0.45</td> <td>300 psi (21 bar)</td> </tr> <tr> <td>316 SS</td> <td>0.67</td> <td>750 psi (52 bar), 2" NPT 150 psi (10 bar), 3" 150 # ANSI flange</td> </tr> </tbody> </table>	Material	Min. s.g.	Max. Pressure	Buna N	0.45	300 psi (21 bar)	316 SS	0.67	750 psi (52 bar), 2" NPT 150 psi (10 bar), 3" 150 # ANSI flange
Material	Min. s.g.	Max. Pressure														
Buna N	0.45	300 psi (21 bar)														
316 SS	0.67	750 psi (52 bar), 2" NPT 150 psi (10 bar), 3" 150 # ANSI flange														
Indication Markings					N C		Inches, 1/16 in increments Centimeters, 1 mm increments									
Length						00.00	6 to 72" (15.2 to 182.9 cm)*									

*Order length must be in inches.

Level Indicators